


ARCELIK AC - KNX Gateway

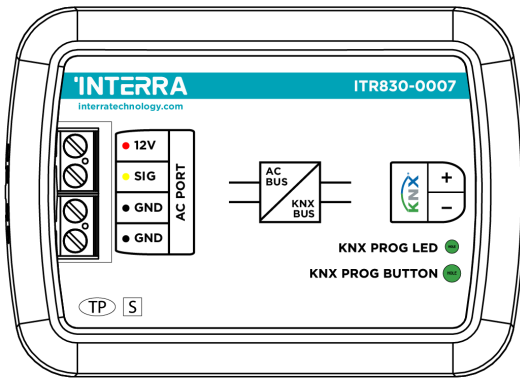

Product Code	ITR830-0007
Power Supply	KNX Power Supply
Power Consumption	5 mA
Push Buttons	1 x KNX Programming Button
LED Indicators	1 x KNX Programming LED
Type of Protection	IP 20
Mode of Commissioning	S-Mode
Maximum Cable Length	50 m
Maximum Air Humidity	< 90 RH
Temperature Range	Operation (0°C...40°C) Storage (-10°C...70°C)
Colour	Light Grey
Dimensions	88 x 62 x 27 mm (W x H x D)
Certification	KNX Certified
Configuration	Configuration with ETS



DESCRIPTION

ITR830-0007 is a air conditioner gateway that used for monitoring and control all the functioning parameters of Arcelik air conditioners via KNX bus line. Arcelik AC - KNX Gateway is compatible with models in several types categorized in compatibility list by Arcelik.

Arcelik AC - KNX Gateway has easy installation feature and can be installed inside the own AC indoor unit or a proper location away from the air conditioner, it connects one side directly to the electronic circuit of the AC indoor unit and in the other side directly to the KNX bus.


DIMENSIONS & CONNECTION DIAGRAM

- All values given in the device dimensions are millimetres.

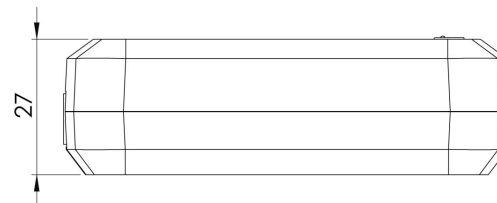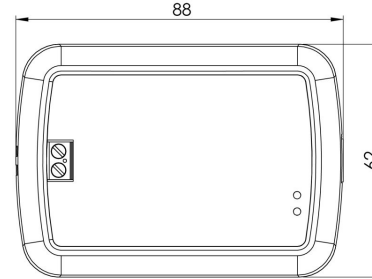

FUNCTIONS

- ITR830-0007 device, provides complete bi-directional integration of Arcelik air conditioners with KNX bus.
- Includes 4 logical advanced parameters, each logical parameter have up to 4 inputs and can be configured as AND, OR & XOR.
- Includes 8 advanced converter parameters, each converter has four operations math calculations according to input type.
- Logic and converter parameters can be used for energy savings, configurable scenes, temperature limits etc.
- The Arcelik AC - KNX gateway provides error notifications for errors that may occur in exceptional cases.

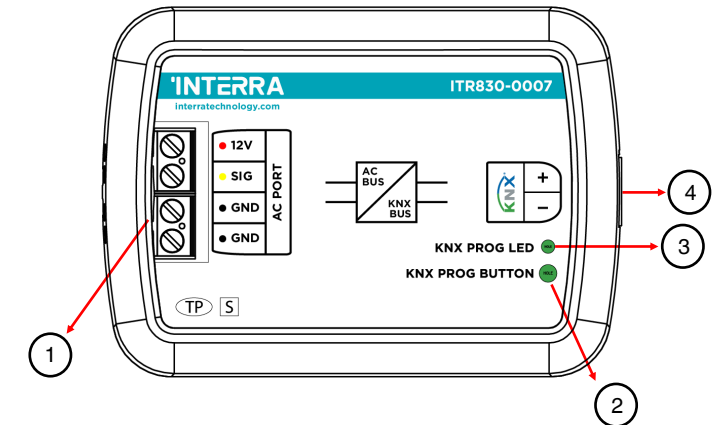

- AC Indoor Unit Connection
- KNX Programming Button
- KNX Programming LED
- KNX Connector

Gateway - Single Indoor Unit :

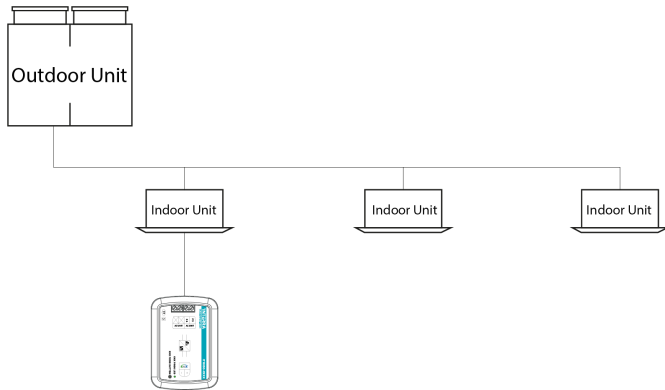


Figure 1

Gateway-Single Indoor Unit + Remote Controller :

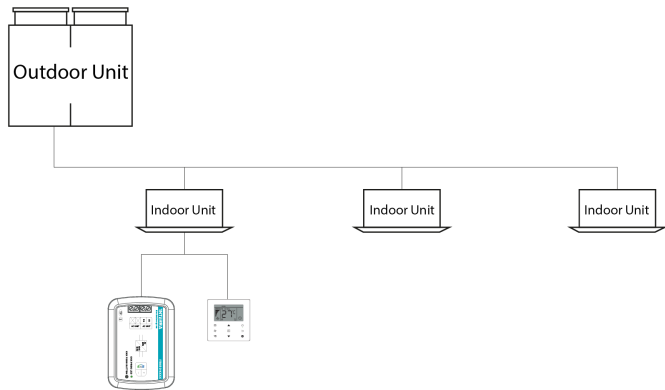


Figure 2

Gateway - Multi Indoor Unit :

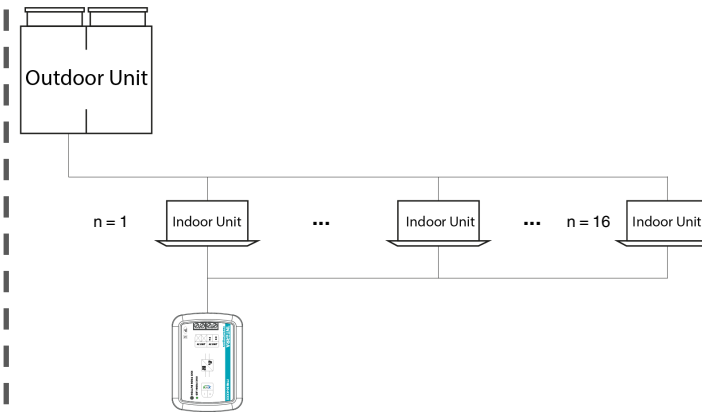


Figure 3

Figure 3 shows the connection diagram between the Arcelik AC-KNX Gateway and multiple air conditioner indoor units. Some indoor unit models do not support multi indoor unit control. For detailed information, you can contact the air conditioner authorized service.

Gateway - Multi Indoor Unit + Remote Controller :

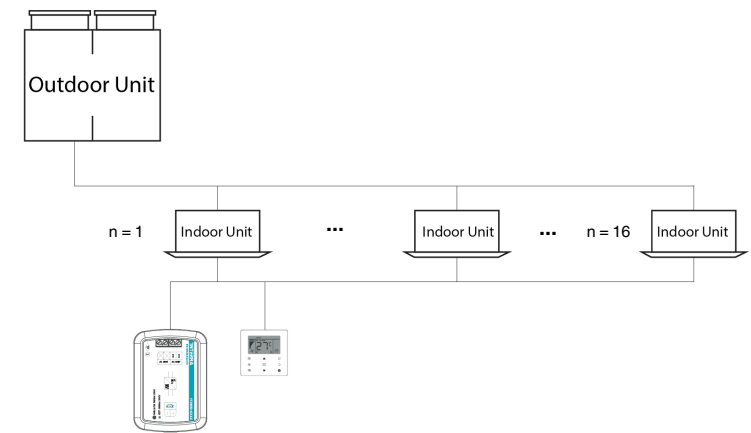


Figure 4

Figure 4 shows the connection diagram between the Arcelik AC-KNX Gateway, air conditioner remote controller and multiple air conditioner indoor units. If more than 2 indoor units are to be connected to an air conditioner remote controller, care must be taken to ensure that the connection is as shown in figure 4. Some Indoor unit models do not support multi indoor unit control. For detailed information, you can contact the air conditioner authorized service.